



JOINT DIMENSIONS								
						TRANS. JOINTS	LONG. JOINTS	
D	a	b	c	d	e	f - min.	f - min.	g
5"	1"	1-3/4"	1-1/2"	1"	2"	1/4 D	1/3 D	1/2 D
6"	1"	2-1/4"	1-1/2"	1"	2-1/2"	1/4 D	1/3 D	1/2 D
8"	1"	3"	2"	1-1/2"	3-1/4"	1/4 D	1/3 D	1/2 D

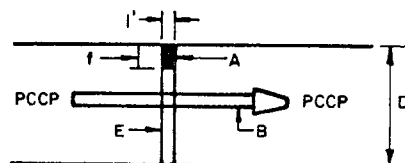

TYPE 5 EXPANSION JOINT

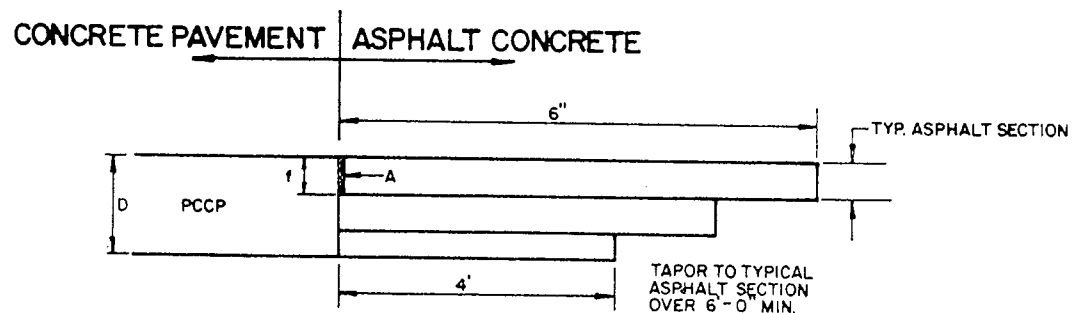

TYPE 6 TRANSITION JOINT
CONCRETE TO ASPHALT

GENERAL NOTES:

1. THICKNESS OF SLAB SHALL BE AS INDICATED ON DRAWINGS. SEE TABLE ABOVE.
2. DAILY CONCRETE PLACEMENT SHALL TERMINATE AT A JOINT.

CONSTRUCTION NOTES:

- A. JOINT FILLER, INSTALL PER MANF. INSTR. OVER BACKER ROD OR JOINT TAPE.
- B. 3/4" Ø 16" SMOOTH DOWEL BAR @ 12" O.C., 1/2 GREASED 1/2 PAINTED.
- C. NO. 4 DEFORMED BARS, 3'-0" LONG AT 2'-0" O.C.
- D. THICKNESS OF SLAB.
- E. COMPRESSIBLE FILLER FULL HEIGHT.

CITY OF ALBUQUERQUE	
REVISIONS	PAVING
	CONCRETE JOINTS TYPES 5 & 6
	DWG.2451
DEC 1992	